




Part number: 30133-1 (X0315-)

Description: Conduit - Light Duty 3 series; .26 O.D. Stranded construction; H.D.P.E. Jacket, H.D.P.E. liner.


Compatible with: .054, .062, .075 core sizes.

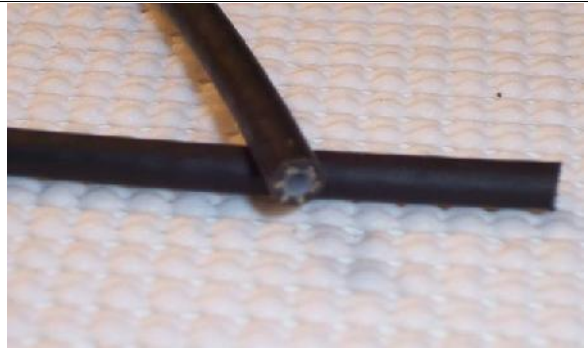

Part number: 52020041 (X0321-)

Description: Conduit – Light Duty; .20 O.D. Braided construction; Polypropylene jacket, Acetal liner.


Compatible with: .054, .062 core sizes.

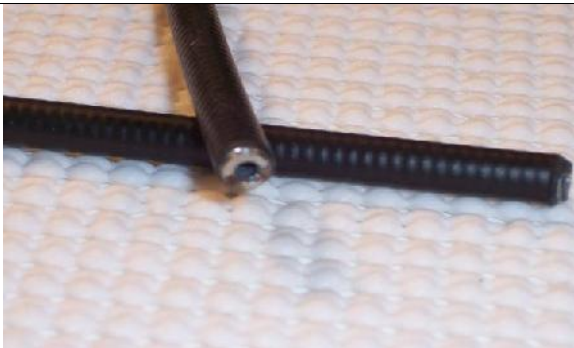

Part number: 98200565 (X1361-)

Description: Conduit – Duraflex; .218 O.D. Coiled construction; H.D.P.E. jacket only, unlined.

Compatible with: .054, .062, .075 core sizes.

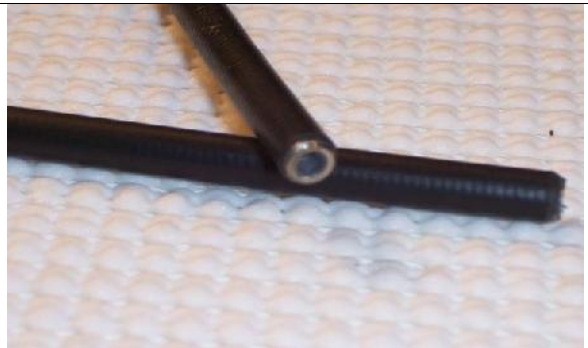

Part number: 98200718 (X1362-)

Description: Conduit – Lined Duraflex; .221 O.D. Coiled construction; H.D.P.E. jacket, H.D.P.E. liner.

Compatible with: .054, .062 core sizes.



Part number: 30502 (X1317-)

Conduit Cap: End Diameter - .355/.360, .375 Dia. stock: Plated Steel

Best used with conduit: 30133-1



Part number: 30648-1 (X1318-)

Threaded Hub: ¼-28 x 7/8, .375 Dia. stock: Plated Steel

Best used with conduit: 30133-1, 98200565 & 98200718



Part number: 30265 (X0314-)

Shoulder hub: End Diameter - .189 x .5, .375 Dia. stock: Plated Steel

Best used with conduit: 30133-1, 98200565 & 98200718


		
Part number: 30310 (X1215-) Disconnect Hub – Vernier: .687 Dia. stock, : Aluminum Best used with conduit: 30133-1, 98200565 & 98200718	Part number: 98201853 (X1323-) Threaded Hub: 5/16-24 x ¾, .313 Dia. stock: Plated Steel Best used with conduit: 52020041, 98200565 & 98200718	Part number: 82185900 (X1322-) Grooved Hub: Nose-.245 Dia. w/.042 x .21 groove, .313 Dia. stock: Plated Steel Best used with conduit: 52020041, 98200565 & 98200718
		
Part number: 98202009 (X1316-) Conduit Cap; .438 Dia. stock, .438 end Dia.: Aluminum Best used with conduit: 98200565 & 98200718	Parts: 98205834 Threaded Flange Hub (X1324-) with 82067200 Internal Seal (X1325-): 3/8-24 x 3/8 thread. Shown with 80007 nut: Plated Steel Best used with conduit: 98200565 & 98200718	Parts: Thread Protectors; 3/16 – yellow, 10317 (X0231-) – black, 98203795 (X1326-). ¼ - black, 10992-1 (X0232-) 5/16 – black, 10992-2 (X0233-) 3/8 – black, 10992-3 (X0234-) Conduit end caps - black: .234 w/.054 hole, 10819-1 (X0159-) .234 w/.075 hole, 10819-2 (X0264-) Core cap, black - .062, 10757-1 (X0230-)
		 - OBSOLETE PART -
Part number: 30731-10 (X0273-) Threaded Hub: 5/16-24 x ¾ thread, .438 Dia. stock: Aluminum Best used with conduit: 52020041	Part number: LH003-1 (X0320-) Threaded Hub: ¼-28 x ¾, .250 Dia. stock: Plated Steel Best used with conduit: 52020041	Part number: LH003-2 (X1327-) Obsolete - replace with 8254200 (See Pg. 7)



Parts: 82103100 Utility Hub, L/D 3 Ser. (X0313-) with 30217 Face Nut(or Dash Plate) (X0311-): 3/8-24 threaded hub. Max. 3" travel. Assembly Shown w/ 80007 nut, 10867-1 washer, 30018-3 rod: Hub & Face Nut- Plated Steel.
Best used with conduit: 30133-1, 98200565 & 98200718



Parts: 98202613 R08 Utility Hub (X1328-) with 98202624 Dash Plate (X1329-): 3/8-24 threaded hub w/flat. Flat allows detent (prevents rotation of rod) for D-stems. Max. 2" travel. Assembly shown with; 80007 & 30007 nuts, 10867-1 washer, 98203231 D-stem: Hub-Brass, Dash Plate-Aluminum.
Best used with conduit: 52020041, 98200565 & 98200718

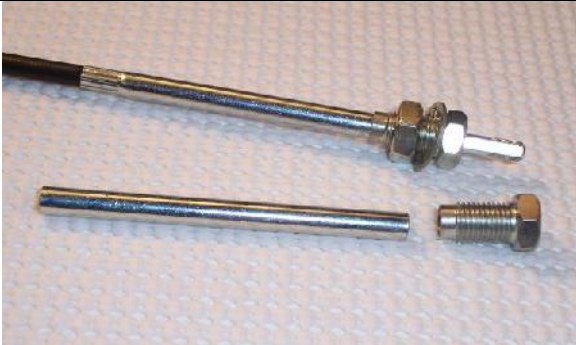

Parts: 98202823 R21-Tube (X1330-) with 98202828 R21-Hex Body (X1333-): 3/8-24 x 1/2 thread on body. Max. 2" travel. Assembly shown with; 80007 nut, 10867-1 washer, 98202532 D-stem: Tube-Plated Brass, Body-Plated Steel.
Best used with conduit: 52020041, 98200565 & 98200718



Parts: 98202823 R21-Tube (X1330-) with 98206019 R21-Short Body w/flat (X1332-): 3/8-24 x 3/8 thread on body. Max. 2" travel. Shown with; 80007 nut, 10867-1 washer, 98204450 Stem w/knob: Tube-Plated Brass, Body-Plated Steel.
Best used with conduit: 52020041, 98200565 & 98200718



Parts: 98202823 R21-Tube (X1330-) with 98206248 R21-Reverse Body w/flat (X1331-): 3/8-24 x 3/8 thread on body. Max. 2" travel. Assembly shown with; 80007 nut, 30007 nut & 98203231 D-stem: Tube-Plated Brass, Body-Plated Steel.
Best used with conduit: 52020041, 98200565 & 98200718



Parts: 98202628 R09 Twist lock Hub (X1319-) with 98202656 Locking-Collet (X1321-) & 98202654 Dash Plate (X1320-): 7/16-20 threaded hub. Max. 2-1/2" travel. Shown with 30013 nut, 10197 washer, 98203000 T-Handle/Square stem: Hub & Collet-Brass, Dash Plate-Aluminum. **Best used with conduit:** 30133-1, 52020041, 98200565 & 98200718



Light Duty Core/Strand X-Packs - Solid Stainless Steel: .054 Dia. 10369 (X1357-); .062 Dia. 98205213 (X1358-) **Stainless Steel Strand, .062 Dia.:** 1x19 construction, 52020133 (X1359-); 7x7 construction, 98205457 (X1360-)



Part number: 30018-3 (X0074-) 3 Series Standard Utility Rod: Specifications for crimping onto smaller core.
Compatible with: .054, .062 core

Part number: 30743-1 (X1342-) Threaded Rod; 10-32 x 5/8, OAL 1.25: Stainless Steel
Compatible with: .054, .062 core


Part number: 82115200 (X0270-) Threaded Rod; 10-32 x 1-1/4, OAL 1.87: Stainless Steel
Compatible with: .054, .062 core



Part number: 30669-1 (X1348-) Boot-Rod, 10-32 x 7/8: Used to secure a boot in groove: Plated Steel
Compatible with: .054, .062 core

Part number: 30244 (X1341-) Threaded Rod; 1/4-28 x 1-3/4, OAL 2.47: Plated Steel
Compatible with: .054, .062 core


Part number: 30246-1 (X0095-) Threaded Rod; 1/4-28 x 1, OAL 1.75: Plated Steel
Compatible with: .054, .062, .075 core

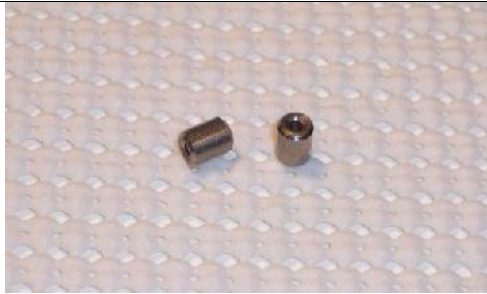


Part number: 30169 (X0265-) Threaded Rod; 1/4-28 x 3/4, OAL 1.25: Stainless Steel
Compatible with: .054, .062, .075 core

Part number: 82042600 (X1346-) Button; 3/16 Dia. x .25 long: Stainless Steel
Compatible with: .054, .062 core

Part number: 98312400 (X1347-) Button-Radius End; 3/16 Dia. x .25 long: Stainless Steel
Compatible with: .054, .062 core

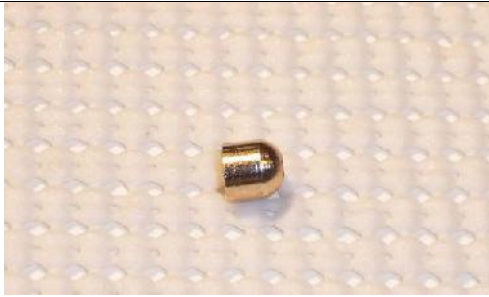

Part number: 30245-1 (X1344-)
Button-Radius End; ¼ Dia. x .25 long:
Plated Steel
Compatible with: .054, .062, .075 core

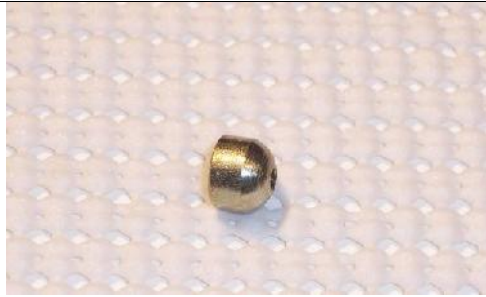

Part number: 30245-3 (X1345-)
Button-Radius End; 5/16 Dia. x .25 long:
Plated Steel
Compatible with: .054, .062, .075 core



Part number: 30471 (X0266-)
Terminal Eye; .265 Dia. Hole: Plated
Steel
Compatible with: .054, .062, .075 core



Parts: 30335-1, Term-eye (X1336-) with
10378, Bearing (X1337-)
Groove to retain boot; ¼" ID w/bearing,
5/16" ID w/o bearing: Plated Steel
Compatible with: .054, .062 core



Parts: 82513000, Ball-joint (X1340-) with
10709, Ball stud (X1338-)
Crimp-on Ball Joint w/retainer clip. Stud
w/1/4-28 x ¾" thread: Plated Steel
Compatible with: .054, .062, .075 core



Part number: 30757-1 (X1334-)
Clevis: Plated .256 Dia. cross hole shown
with: 30245-1 Button on .062 strand.
Compatible with: .054, .062, .075 core,
can also use die cast barrel or ball.



Part number: 82130500 (X1335-)
Threaded Connector: Alum. ¼-28 x .5 I.D.
s/w 98312400 Button on .062 strand.
Compatible with: .054, .062 core



Part number: 98204450 (X1351-)
Stem w/Knob: Plated. Used with R08 &
R21 utility heads.
Compatible with: .054, .062, .075 core



Part number: 30049-1 (X0091) 3 Series
Standard Swivel: Specifications for
crimping onto smaller core.
Compatible with: .054, .062 core



		
Part number: 98202532 (X1350-) D-Stem, knurled end: Plated. For R08 & R21 utility heads. Flat side to prevent rotation. Knurled for press-on knob. Compatible with: .054, .062, .075 core	Part number: 98203231 (X1349-) D-Stem, 10-32 x .5 thread. For R08 & R21 utility heads. Flat side to prevent rotation. Requires thread on knob. Compatible with: .054, .062, .075 core	Part number: 98204431 (X1354-) "Choke" Knob Press-on. For R08 & R21 utility heads. Press onto 98202532. Other press-on knobs available contact factory for details and availability.
		
Part number: 82153700 (X1355-) Knob w/10-32 thread. For R08 & R21 utility heads. Threads onto 98203231. Other knobs available contact factory for details and availability.	Part: Chrome T-Handle 98314200 (X1356-), 10-32 thread for use on 98203231 D-Stem. 98203236 (X1352-) made to press onto 98202532 D-Stem.	Part number: 98203000 (X1353-) Chrome T-Handle on square stem. Used with R09 "Twist-Lock" head assembly Compatible with: .054 solid core only: Can be modified for larger solid core.
		
Parts: 10708 Ball Joint (X1339-) with 10709 Ball Stud (X1338-) Ball Joint; quick disconnect w/10-32 threaded hole. Stud w/1/4-28 x 3/4" thread: Plated Steel	Zink, Die-Cast Barrel Assemblies: 96" long, .062 Dia. 7x7 strand construction. X-pack; 25 ea. Barrel sizes available: .200 Dia. x .420: 92014501, X1310-00 .236 Dia. x .315: 92014502, X1311-00 .312 Dia. x .470: 92014503, X1312-00	Zink, Die-Cast Ball End Assemblies: 96" long, .062 Dia. 7x7 strand construction. X-pack; 25 ea. Ball diameters available: .187 Dia. – 92045200, X1313-00 .250 Dia. – 92045201, X1314-00 .312 Dia. – 92045202, X1315-00

Additional fittings available (Not Shown):
• 98203296 5/16-24 X 1-7/16 Hub (2" OAL)
• 98201725 #10-32 X 1/2" Rod (0.80" OAL)



Part number: 82542000 (X1327-)
Replaces LH003-2: Conduit Cap: .280
Dia. stock: Plated Steel
Best used with conduit: 52020041,
98200565 & 98200718